


A02-I

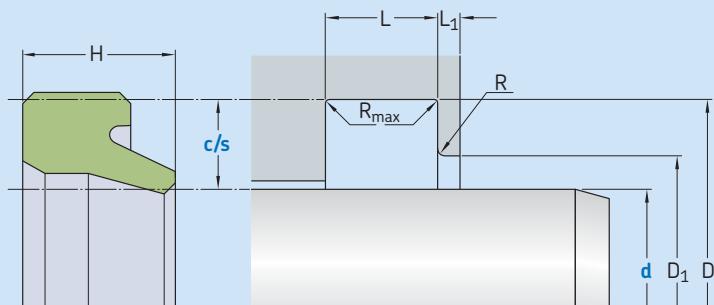

Ordering dimensions in **blue**

Surface roughness $R_{t\max}$ R_a

Sliding surface $\leq 2,5 \mu\text{m}$ $0,05\text{--}0,3 \mu\text{m}$

Bottom of groove $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$

Groove face $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions

d f8 over	c/s incl.	D H11	D ₁ H11	L + 0,2	L ₁	R _{max}	R	H
mm								
5	28	3	d + 6	d + 2,5	4	≥ 2	0,4	$\leq 0,43$
28	56	4	d + 8	d + 3	5	≥ 2	0,4	$\leq 0,43$
56	110	5	d + 10	d + 3	6	≥ 2	0,4	$\leq 0,43$
110		7,5	d + 15	d + 4	8,5	≥ 2	0,4	$\leq 0,4$
11								

Ordering example

Profile

d x c/s [mm]

Sealing material

Wiper A02-I

50 x 4

ECOPUR

Operating parameters

Material Seal	Temperature		Speed ¹⁾ max
	from	to	
-	°C		m/s
■ ECOPUR	-30		
■ H-ECOPUR	-20		
■ S-ECOPUR			
■ T-ECOPUR	-50	+110	
■ X-ECOPUR	-30		
■ X-ECOPUR H	-20		
■ X-ECOPUR S			4
■ SKF Ecoflas	-10	+200	
■ SKF Ecorubber-H	-25	+150	
■ SKF Ecorubber-1	-30	+100	
■ SKF Ecorubber-2	-20	+200	
■ SKF Ecorubber-3	-50	+150	

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.