


A11-A

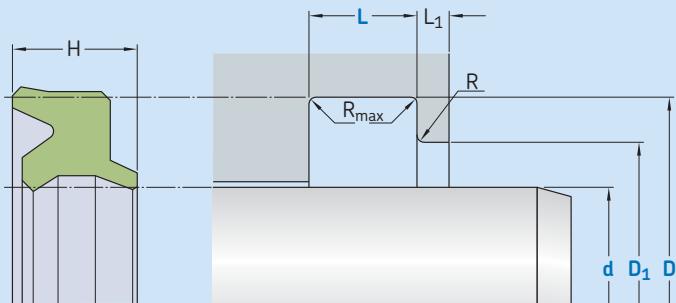

Ordering dimensions in **blue**

Surface roughness $R_{t\max}$ R_a

Sliding surface $\leq 2,5 \mu\text{m}$ $0,05\text{--}0,3 \mu\text{m}$

Bottom of groove $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$

Groove face $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions

d f8 over	D H11 incl.	D_1 H11	L $+0,2$	L_1	$R_{t\max}$	R	H
mm							
5	50	d + 8	d + 4	5	≥ 2	0,4	$\leq 0,3$
50	100	d + 10	d + 5	6	≥ 2	0,4	$\leq 0,4$
100		d + 15	d + 7,5	8,5	≥ 2	0,4	$\leq 0,4$

Ordering example

Profile

d x D/D_1 x L [mm]

Sealing material

Wiper A11-A

50 x 58/54 x 5

ECOPUR

Operating parameters

Material Seal	Temperature		Speed ¹⁾ max
	from	to	
-	°C		m/s
■ ECOPUR	-30		
■ ECOPUR LD	-35		
■ G-ECOPUR	-30		4
■ H-ECOPUR	-20	+110	
■ S-ECOPUR	-50		5
■ T-ECOPUR	-10	+200	
■ SKF Ecoflas	-25	+150	
■ SKF Ecorubber-H	-30	+100	4
■ SKF Ecorubber-1	-20	+200	
■ SKF Ecorubber-2	-50	+150	
■ SKF Ecorubber-3			

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

The pressure on the standard version is limited to 16 bar.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.