


K1012-T

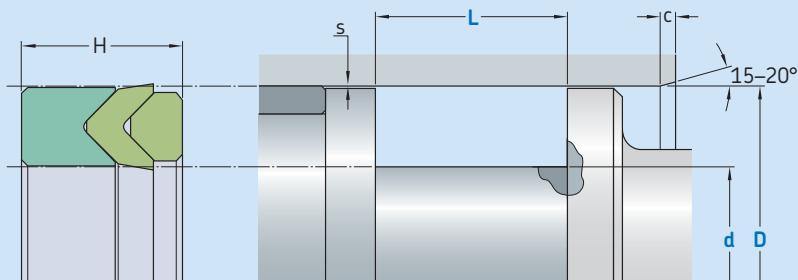

Ordering dimensions in **blue**

Surface roughness $R_{t\max}$ R_a

Sliding surface $\leq 2,5 \mu\text{m}$ $0,05\text{--}0,2 \mu\text{m}$

Bottom of groove $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$

Groove face $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions

D H9 over	d h10 incl.	L $+0,2$	$R_{t\max}$	C	s^*
mm					
40	40	D-10	9,5	0,4	4,0
75	75	D-15	12,3	0,4	5,0
75	150	D-20	21,2	0,4	6,0
150	200	D-25	25,8	0,4	8,5
200	300	D-30	33,5	0,4	10,0
300		D-40	41,5	0,4	13,0
mm					

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values

Ordering example

Profile

D x d x L [mm] / No. of chevrons

Support ring / Chevron / Pressure ring

Piston seal K1012-T

100 x 80 x 21,2 / 2

SKF Ecotal / ECOPUR / SKF Ecotal

Operating parameters

Material			Temperature	Speed¹⁾	Pressure²⁾
Support ring K10-A	Chevron K11-T	Pressure ring K12-T	from to	max	max
-			°C	m/s	bar (MPa)
■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	■ ECOPUR	■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	+100		
■ SKF Ecomid	■ ECOPUR LD ■ G-ECOPUR	■ SKF Ecomid	-30	0,5	500 (50)
■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	■ H-ECOPUR ■ S-ECOPUR	■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	-20	0,7	
■ SKF Ecoflon 2	■ SKF Ecorubber-H ■ SKF Ecorubber-1 ■ SKF Ecorubber-2 ■ SKF Ecorubber-3	■ SKF Ecoflon 2	-25 -30 -20 -50 +150 +100 +200 +150	0,5	250 (25)

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.

³⁾ D ≤ 260 mm → SKF Ecotal, D > 260 mm → SKF Ecomid. Depending on the application, other material combinations are possible. Contact SKF for more information.