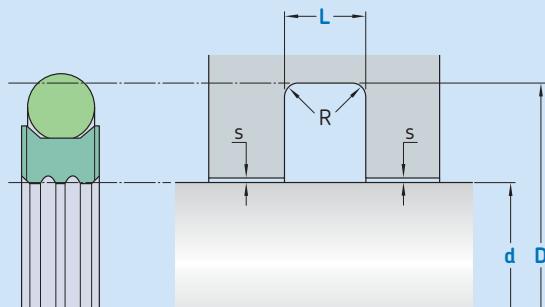


# R09-F

Ordering dimensions in **blue**

Surface roughness	$R_{t\max}$	$R_a$
<b>Sliding surface</b>	$\leq 2 \mu\text{m}$	$0,05\text{--}0,3 \mu\text{m}$
<b>Bottom of groove</b>	$\leq 6,3 \mu\text{m}$	$\leq 1,6 \mu\text{m}$
<b>Groove face</b>	$\leq 15 \mu\text{m}$	$\leq 3 \mu\text{m}$

Hardness: On the surface min 55 HRC, hardened depth > 0,3 mm.  
 Bearing area: 50–95% and a cutting depth of 0,5  $R_z$  based on  $C_{ref} = 0\%$

d f8 over	Standard dimensions	D H9 incl.	L + 0,2	R	Maximal radial extrusion gap		
					s*	100 bar	200 bar
mm							
5	19		d + 4,9	2,2	0,3	0,15	0,10
19	38		d + 7,5	3,2	0,5	0,20	0,15
38	200		d + 11	4,2	0,7	0,25	0,20
200	256		d + 15,5	6,3	1,2	0,30	0,25
256	650		d + 21	8,1	1,5	0,30	0,25
650	1 000		d + 28	9,5	2,0	0,45	0,30
mm							
0,10							
0,10							
0,10							
0,15							
0,15							
0,10							
0,15							
0,10							
0,15							
0,15							
0,20							
0,20							
0,20							
0,25							
0,25							
0,25							
0,30							
0,30							
0,20							

\* Extrusion gap values shown above are valid for a temperature of 80 °C, higher temperatures require lower values.

**Ordering example**

Profile

d x D x L [mm]

Sealing material / Energizer

**Rotary seal R09-F**

100 x 111 x 4,2

SKF Ecoflon 4 / NBR70

**Operating parameters**

Material Seal	Energizer	Temperature		Speed <sup>1)</sup>	Pressure <sup>2)</sup>
		from	to	max	max
-		°C		m/s	bar (MPa)
■ SKF Ecolon 4	FPM75	-20	+200	0,4	350 (35)
	NBR70	-30	+100		

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

<sup>1)</sup> Surface speed limit values are valid only in the presence of a lubrication film.

<sup>2)</sup> Pressure ratings depend on the size of the extrusion gap.