
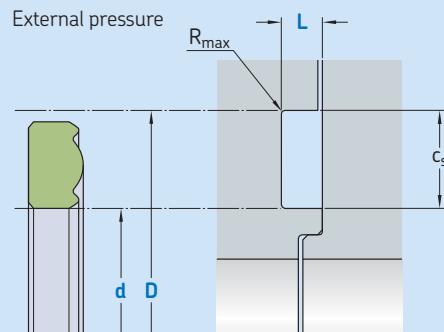


# R20-P

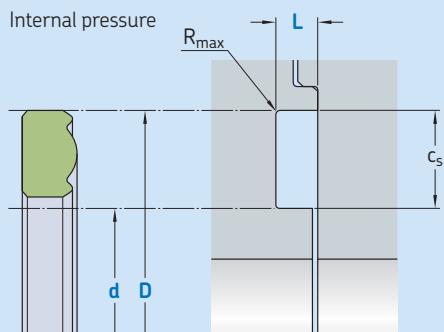

Ordering dimensions in **blue**

Pressure Surface roughness	Constant		Pulsating	
	$R_{tmax}$	$R_a$	$R_{tmax}$	$R_a$
	mm	mm	mm	mm
<b>Sliding surface</b>	12,5	3,2	6,3	1,6
<b>Bottom of groove</b>	12,5	3,2	6,3	1,6
<b>Groove face</b>	12,5	3,2	6,3	1,6

Bearing area: 50–95% and a cutting depth of  $0,5 R_z$  based on  $C_{ref} = 0\%$

Standard dimensions		$d$	$D$	$C_s$	$L$	$R_{max}$
$d$ $h11$ over incl.	$H11$	mm	mm	mm	mm	mm
5	75		$d + 15$	7,5	2,5	0,4
75	100		$d + 16$	8	4	0,4
100	150		$d + 20$	10	5	0,4
150	200		$d + 25$	12,5	6	0,4
200	350		$d + 30$	15	7,5	0,4
350	600		$d + 40$	20	10	0,4

Standard definition for this profile is inner pressure.  
 $d h11 = D H11$

## Ordering example

Profile

$d \times D \times L$  [mm]

Sealing material

Rotary seal R20-P

100 x 125 x 7,7

ECOPUR

**Operating parameters**

Material Seal	Temperature		Speed	Pressure
	from	to	max	max
-	°C		m/s	bar (MPa)
■ ECOPUR	-30			
■ ECOPUR LD	-35			
■ G-ECOPUR	-30			
■ H-ECOPUR	-20	+110	only recommended for static application	800 (80)
■ S-ECOPUR	-50			
■ T-ECOPUR	-20			

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously. Standard of this profile is inner pressure.