


S03-P

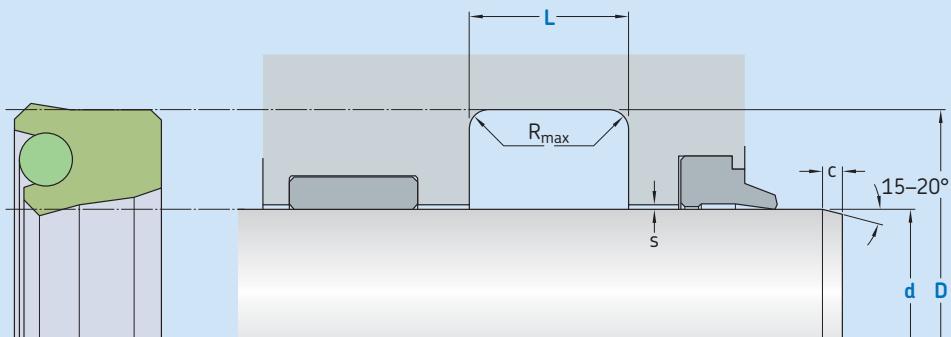

Ordering dimensions in blue

| Surface roughness | $R_{t\max}$ | R_a |
|-------------------------|------------------------|--------------------------------|
| Sliding surface | $\leq 2,5 \mu\text{m}$ | $0,05\text{--}0,3 \mu\text{m}$ |
| Bottom of groove | $\leq 6,3 \mu\text{m}$ | $\leq 1,6 \mu\text{m}$ |
| Groove face | $\leq 15 \mu\text{m}$ | $\leq 3 \mu\text{m}$ |

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

| d f8 | over | D H10 | L $+ 0,2$ | $R_{t\max}$ | c | Maximal radial extrusion gap | | | |
|---------|-------|----------|----------------|-------------|------|------------------------------|---------|---------|---------|
| | | | | | | 20 bar | 100 bar | 200 bar | 400 bar |
| mm | | | | | | | | | mm |
| 5 | 25 | d + 8 | 6,3 | 0,4 | 3,5 | 0,33 | 0,18 | 0,10 | 0,05 |
| 25 | 50 | d + 10 | 8,0 | 0,4 | 4,0 | 0,37 | 0,23 | 0,15 | 0,10 |
| 50 | 150 | d + 15 | 10,0 | 0,4 | 5,0 | 0,46 | 0,33 | 0,25 | 0,18 |
| 150 | 300 | d + 20 | 14,0 | 0,4 | 6,0 | 0,54 | 0,38 | 0,33 | 0,25 |
| 300 | 500 | d + 25 | 17,0 | 0,4 | 8,5 | 0,61 | 0,45 | 0,40 | 0,33 |
| 500 | 600 | d + 30 | 25,0 | 0,4 | 10,0 | 0,67 | 0,50 | 0,45 | 0,40 |
| 600 | 1 000 | d + 40 | 32,0 | 0,4 | 13,0 | 0,67 | 0,50 | 0,45 | 0,40 |
| 1 000 | 1 600 | d + 50 | 40,0 | 0,4 | 15,0 | 0,80 | 0,60 | 0,50 | 0,40 |
| 1 600 | 2 000 | d + 60 | 47,0 | 0,4 | 18,0 | 0,90 | 0,70 | 0,50 | 0,40 |
| 2 000 | 2 500 | d + 80 | 62,0 | 0,4 | 20,0 | 0,90 | 0,70 | 0,50 | 0,40 |

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

Ordering example

Profile

d x D x L [mm]

Sealing material / Energizer

Rod seal S03-P

100 x 115 x 10

ECOPUR / NBR 70

Operating parameters

| Material Seal | Energizer | Temperature | | Speed ¹⁾ max | Pressure ²⁾ max |
|------------------|-----------|-------------|------|----------------------------|-------------------------------|
| | | from | to | | |
| - | | °C | | m/s | bar (MPa) |
| ■ ECOPUR | NBR70 | -30 | +100 | | |
| ■ ECOPUR LD | | -35 | +110 | 0,5 | |
| ■ G-ECOPUR | | -30 | | | 400 (40) |
| ■ H-ECOPUR | | -20 | +100 | | |
| ■ S-ECOPUR | | | | 0,7 | |
| ■ T-ECOPUR | MVQ70 | -50 | +110 | 0,5 | |

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.