


S05-R

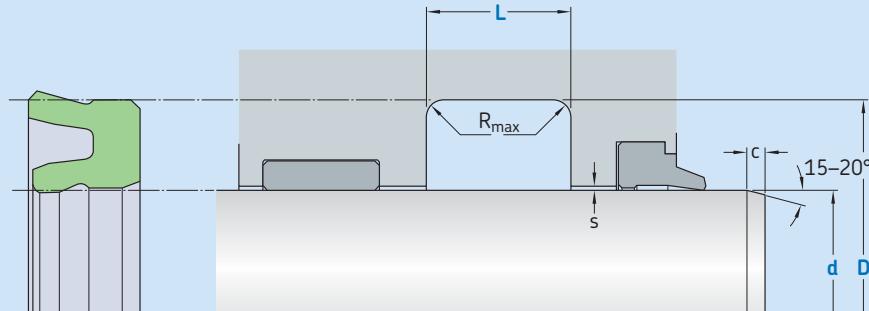

Ordering dimensions in **blue**

Surface roughness $R_{t\max}$ R_a

Sliding surface $\leq 2,5 \mu\text{m}$ $0,05\text{--}0,3 \mu\text{m}$

Bottom of groove $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$

Groove face $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

Standard dimensions

d f8 over	D H10 incl.	L $+0,2$	$R_{t\max}$	c	s^*
mm					
5	25	d + 8	6,3	0,4	3,5
25	50	d + 10	8,0	0,4	4,0
50	150	d + 12	10,0	0,4	5,0
150	300	d + 16	14,0	0,4	6,0
300	500	d + 20	17,0	0,4	8,5
500	700	d + 24	25,0	0,4	10,0
700	1 000	d + 30	32,0	0,4	13,0
1 000		d + 40	32,0	0,4	13,0

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

Ordering example

Profile

d x D x L [mm]

Sealing material

Rod seal S05-R

100 x 112 x 10

SKF Ecorubber-1

Operating parameters

Material Seal	Temperature		Speed ¹⁾	Pressure
	from	to	max	max
-	°C		m/s	bar (MPa)
■ SKF Ecoflas	-10	+200		
■ SKF Ecorubber-H	-25	+150		
■ SKF Ecorubber-1	-30	+100	1	25 (2,5)
■ SKF Ecorubber-2	-20	+200		
■ SKF Ecorubber-3	-50	+150		

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.