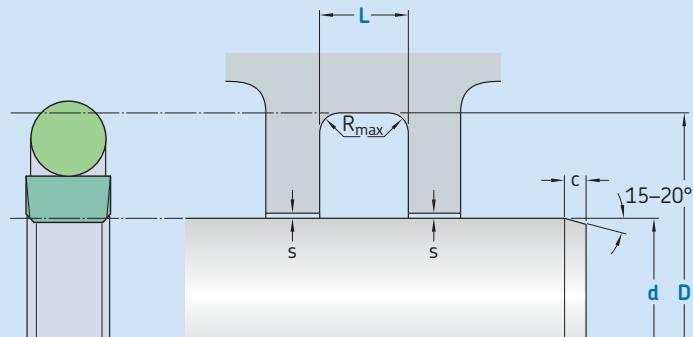


S09-D

X-Slide

Ordering dimensions in **blue**

Surface roughness	$R_{t\max}$	R_a
Sliding surface	$\leq 2,5 \mu\text{m}$	$0,05\text{--}0,3 \mu\text{m}$
Bottom of groove	$\leq 6,3 \mu\text{m}$	$\leq 1,6 \mu\text{m}$
Groove face	$\leq 15 \mu\text{m}$	$\leq 3 \mu\text{m}$

Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$

d f8	D H10	L + 0,2	Standard dimensions		$R_{t\max}$	c	OD	Maximal radial extrusion gap				
			over	incl.				s*	100 bar	200 bar	400 bar	600 bar
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
4	8	d + 4,9	2,2	0,4	2,5	1,78	0,30	0,30	0,20	0,10		
8	19	d + 7,3	3,2	0,6	3,5	2,62	0,40	0,30	0,20	0,10		
19	38	d + 10,7	4,2	1,0	4,5	3,53	0,50	0,40	0,30	0,20		
38	200	d + 15,1	6,3	1,3	5,0	5,33	0,50	0,40	0,30	0,20		
200	256	d + 20,5	8,1	1,8	6,0	7,00	0,70	0,50	0,40	0,20		
256	650	d + 24,0	8,1	1,8	8,0	7,00	0,70	0,50	0,40	0,20		
650	1 000	d + 27,3	9,5	2,5	10,0	8,40	0,80	0,70	0,50	0,30		
1 000	3 000	d + 38,0	13,8	3,0	12,0	12,00	1,10	0,80	0,70	0,40		

* Extrusion gap values shown above are valid for a temperature of 80 °C, higher temperatures require lower values.

Ordering example

Profile

d x D x L [mm]

Sealing material / Energizer

X-Slide S09-D

100 x 115,1 x 6,3

X-ECOPUR / NBR70

Operating parameters

Material Glide ring	Energizer	Temperature		Speed ¹⁾ max	Pressure ²⁾ max
		from	to		
-		°C		m/s	bar (MPa)
G-ECOPUR 54D	MVQ70	-55	+110		
X-ECOPUR					600 (60)
X-ECOPUR H					
X-ECOPUR S	NBR70	-30	+100	5	
SKF Ecowear 1000	MVQ70	-55	+90		400 (40)
	NBR70	-30			

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.