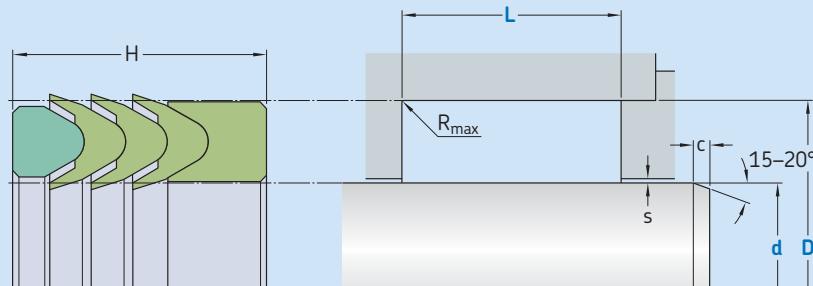


S1315-T

Ordering dimensions in **blue**Surface roughness $R_{t\max}$ R_a **Sliding surface** $\leq 2,5 \mu\text{m}$ $0,05\text{--}0,3 \mu\text{m}$ **Bottom of groove** $\leq 6,3 \mu\text{m}$ $\leq 1,6 \mu\text{m}$ **Groove face** $\leq 15 \mu\text{m}$ $\leq 3 \mu\text{m}$ Bearing area: 50–95% and a cutting depth of $0,5 R_z$ based on $C_{ref} = 0\%$ **Standard dimensions**

d f8 over	D H10 incl.	L $+0,2$	$R_{t\max}$	c	s^*
mm					
10	40	d + 10	16	0,4	4
40	75	d + 15	25	0,4	5
75	150	d + 20	32	0,4	6
150	200	d + 25	40	0,4	8,5
200	300	d + 30	50	0,4	10
300		d + 40	63	0,4	13
1,00					

* Extrusion gap values shown above are valid for a temperature of 70 °C, higher temperatures require lower values.

Ordering example

Profile

d x D x L [mm] / Number of chevrons

Pressure ring / Sealing material / Support ring

Rod Seal S1315-T

100 x 120 x 25 / 2

SKF Ecotal / ECOPUR / SKF Ecotal

Operating parameters

Material	Pressure ring S13-A	Chevron S14-T	Support ring S15-T	Temperature	Speed ¹⁾	Pressure ²⁾
				from to	max	max
-				°C	m/s	bar (MPa)
■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	■ ECOPUR	■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾		-30		
■ SKF Ecomid	■ ECOPUR LD ■ G-ECOPUR	■ SKF Ecomid		-35 -30	+100	0,5 500 (50)
■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾	■ H-ECOPUR ■ S-ECOPUR	■ SKF Ecotal ³⁾ ■ SKF Ecomid ³⁾		-20		0,7

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.

³⁾ D ≤ 260 mm → SKF Ecotal, D > 260 mm → SKF Ecomid. Depending on the application, other material combinations are possible.

Contact SKF for more information.